

NAG-20

NAG-20 is a **versatile Energy Saving** agitator suitable for **small chillers** where **compact size** is required and there is **little ventilation space**. Thanks to **many available configurations** it easily fits different installations.



TECHNICAL SPECIFICATIONS









Category	Energy saving AGITATOR.
Windings	Single-phase motor. Insulation Class F.
Motor body	Extruded aluminium casing.
Protection	IP 44 ingress protection rating.
Safety	Built-in thermal motor protection system.
Ball bearings	NSK and SKF (long-life) self-lubricant bearings or equivalent, in semi-rigid noise-damping housings.
Motor shaft	AISI 303 INOX steel.
Fastening parts	INOX steel or corrosion-resistant materials.
Motor parts	Thermoplastic motor parts resistant to high temperature.
Cooling system	This device does not require a fan.
Operation	Power supply 230 Volts - 24 hours a day non stop. Clean non drinkable water only.
Regulations	Complying with EN60335-2-41:2003/A2:2010 and WEEE/RoHs directives.
Note	Read the instruction booklet for correct set up and use.

COMPACT VERSION

WITHOUT FIXING PLATE

STANDARD VERSION

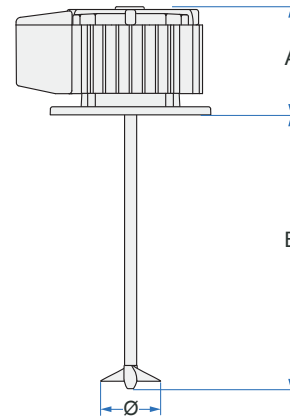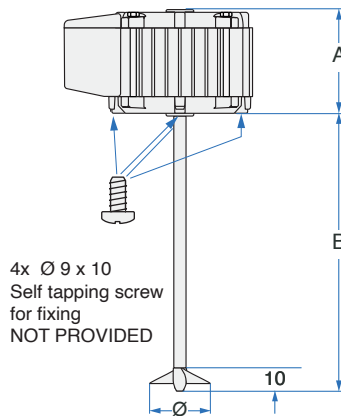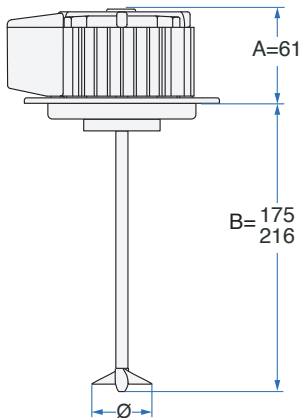

TYPE	Volt	Hz	Amp	Watt	RPM	A	B	Propeller Ø [mm]	Weight [Kg]
NAG-20	230	50	0,02	14	2914	72	163/204	40x15° 2 Blades	1,3
NAG-20	230	50	0,05	18	2866	72	165/206	50x15° 2 Blades	1,3
NAG-20	230	50	0,07	20	2850	72	166/207	55x15° 2 Blades	1,3
NAG-20	230	50	0,08	22	2800	72	171/212	62x15° 2 Blades	1,3